



CE RoHS UK CA

WIRELESS RECEIVER AC100-240V

Ref. 220115

TECHNICAL INFORMATION

Model: SC01

Input voltage: AC100-240V

Input frequency: 50/60 Hz

Stand by consumption: <0.4W

Light: When the light flashes for a few seconds, it means that the synchronization is being carried out correctly.

Range: 20 m (indoor) / 80 m (outdoor)

Use: combined with the kinetic switch

Product size: 64x32x23 mm

Box size: 96x72x31 mm

Product weight: 37g

Shell material: PC + ABS fire rating V0

Control power: 10A version 800W (resistive) 300W (LED)
16A version 1500W (resistivity) 500W (LED)



HOW TO USE

The receiver allows control through a kinetic switch, enabling both individual and multiple control.


To pair them, first press the pairing button for 3–4 seconds until the light starts flashing. Once this happens, press the switch button for a few seconds and the synchronization will be completed. To unpair, press and hold the pairing button for 7 seconds or more.

Up to 10 receivers can be linked to the same switch. To do this, simply repeat the pairing process each time you want to add a new switch.

HOW IT CONNECTS

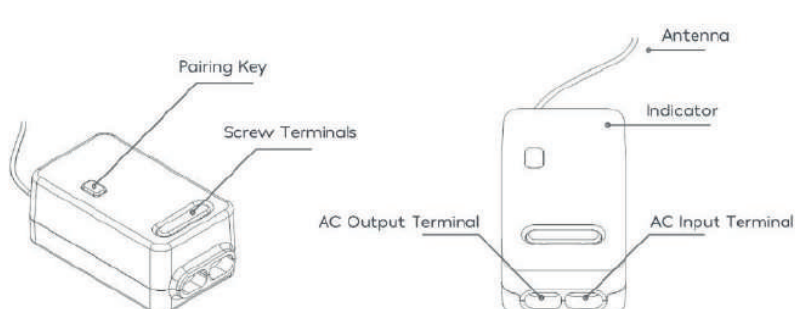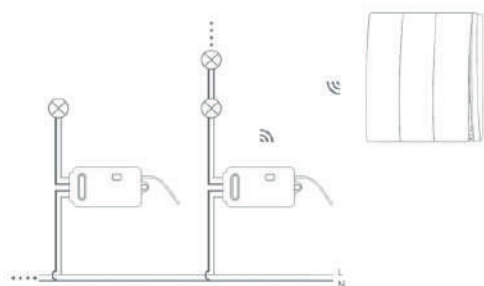

When the switch and the receiver are synchronized, press the switch to complete the pairing.





CE RoHS UKCA

RECEPTOR INALÁMBRICO AC100-240V

Ref. 220115

INFORMACIÓN TÉCNICA

Modelo: SC01

Voltaje de entrada: AC100-240V

Frecuencia de entrada: 50/60 Hz

Consumo en stand by: <0.4W

Potencia: 10A version 800W (resistive) 300W (LED)
16A version 1500W (resistivity) 500W (LED)

Luz: cuando la luz parpadea unos segundos, significa que se está realizando la sincronización correctamente..

Distancia: 20 m (interior) / 80 m (exterior)

Uso: combinado con el interruptor cinético

Tamaño del producto: 64x32x23 mm

Tamaño de la caja: 96x72x31 mm

Peso del producto 37g

Material de la carcasa: PC + ABS con grado de inflamabilidad V0


USO

El receptor permite el control mediante un interruptor cinético, facilitando tanto el control individual como el múltiple.

Para empajararlos, primero se pulsa el botón de emparejamiento durante 3-4 segundos hasta que la luz empiece a parpadear. Una vez ocurra esto, pulsa el botón del interruptor durante unos segundos y se habrá hecho la sincronización. Para desincronizar, mantén pulsado el botón de emparejamiento 7 segundos o más.

Pueden unirse hasta 10 receptores en un mismo receptor. Para ello, basta con repetir el proceso de emparejamiento cada vez que queramos unir un interruptor nuevo.

CÓMO SE CONECTA

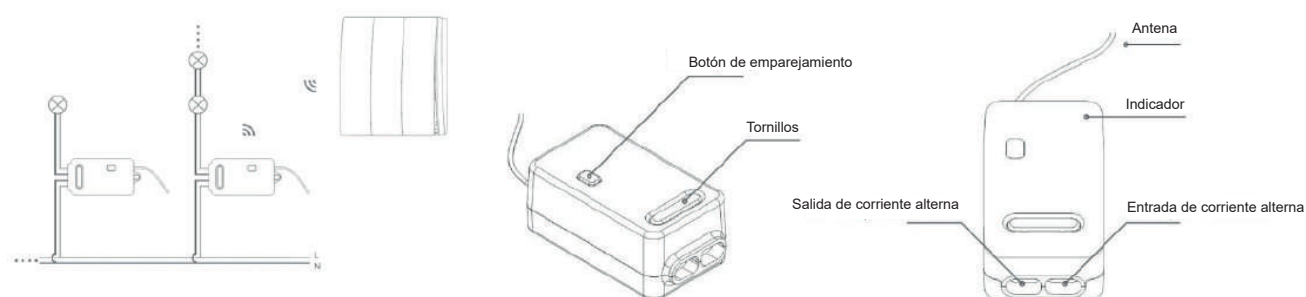

Cuando ambos aparatos estén emparejados, pulsa el botón del interruptor para terminar completar la sincronización.

